

Tondo orientabile - Round adjustable



P.422



Materiale - Material

ABS termoresistente - Thermoresistent ABS



Colore - Colour

secondo codice - according to item code



Pezzi confezione - Package items

50 pezzi - pieces



Volume confezione - Package volume

24,3 dm³ - 400 X 280 X 200 mm



Peso confezione - Package weight

secondo codice - according to item code



Intensità luminosa - Light intensity

vedi sez. tecnica - see technical section



Accessori - Accessories

P421 - Air diffuser sez. C



Temp. di esercizio - Working temp.

-10/+120 °C (14/248 °F)



Normative - Norms

R107.8; R118.3; FMVSS 302; ISO 3795; REACH; ROHS; CM
More info on page D2-D3 and website on "Directives and regulations" area.

NEW



P.422

Cod.	Colore - Colour	Volt			
69302	nero - black	12	LED (pca) included	included	3.050
67693	grigio - grey Ral 7043	12	LED (pca) included	included	3.050
69312	grigio - grey Ral 7001	12	LED (pca) included	included	3.050
69962	nero - black	24	LED (pca) included	included	3.050
67713	grigio - grey Ral 7043	24	LED (pca) included	included	3.050
69972	grigio - grey Ral 7001	24	LED (pca) included	included	3.050
60533*	grigio - grey Ral 7043	24	LED (pca) included	included	2.600







tipologia di illuminazione - lighting type



cablaggio - wiring

* senza anello esterno - without outer ring

P.422

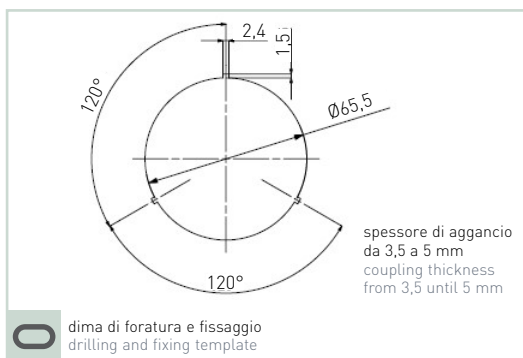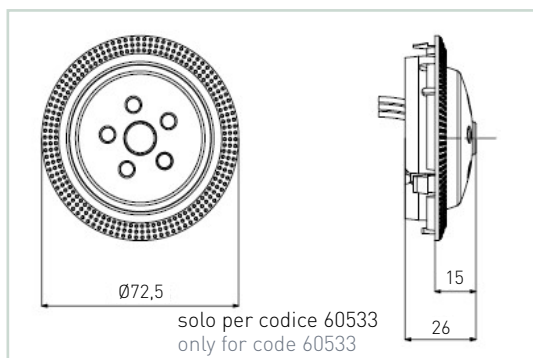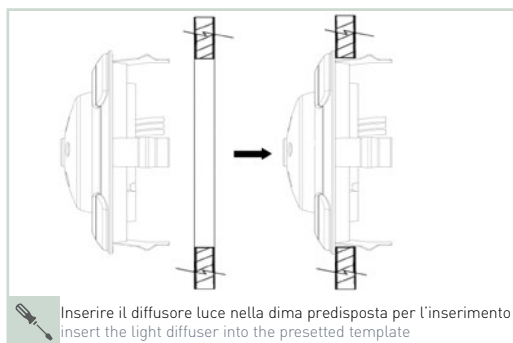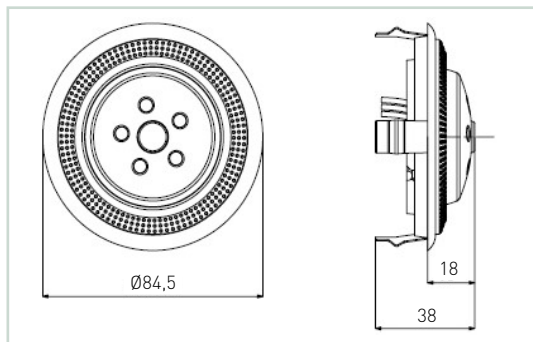

■ Test intensità luminosa - Light intensity test

