

Tondo orientabile - Round adjustable



P.424



Materiale - Material
ABS termoresistente - Thermoresistent ABS



Colore - Colour
secondo codice - according to item code



Pezzi confezione - Package items
50 pezzi - pieces



Volume confezione - Package volume
24,3 dm³ - 400 X 280 X 200 mm



Peso confezione - Package weight
3.050 g



Intensità luminosa - Light intensity
vedi sez. tecnica - see technical section



Accessori - Accessories
P423 - Air diffuser sez. C



Temp. di esercizio - Working temp.
-10/+120 °C (14/248 °F)



Normative - Norms
R107.8; R118.3; FMVSS 302; ISO 3795; REACH; ROHS; CMR.
More info on page D2-D3 and website on "Directives and regulations" area.



P.424

Cod.	Colore - Colour	Volt		
69322	nero - black	12	LED (pca) included	included
67723	grigio - grey Ral 7043	12	LED (pca) included	included
69332	grigio - grey Ral 7001	12	LED (pca) included	included
69982	nero - black	24	LED (pca) included	included
67733	grigio - grey Ral 7043	24	LED (pca) included	included
69992	grigio - grey Ral 7001	24	LED (pca) included	included






tipologia di illuminazione - lighting type



cablaggio - wiring

P.424

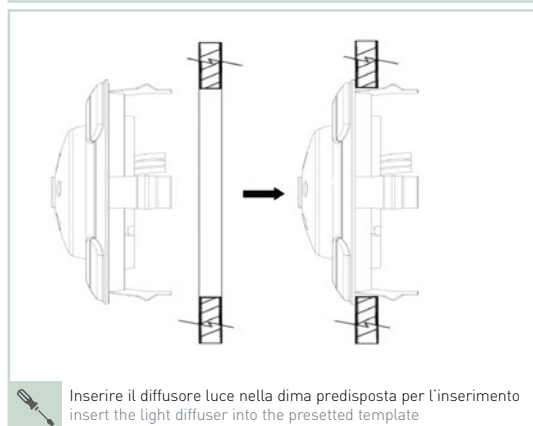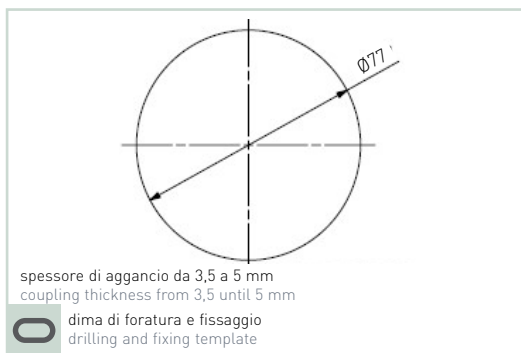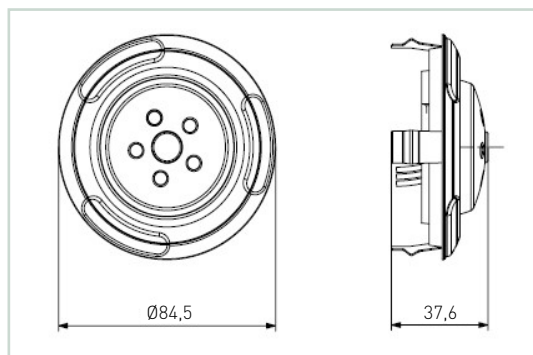

■ Test intensità luminosa - Light intensity test

